



GREENWAY®

HCP-42 Multitasking CNC Lathe 車銑複合數控車床

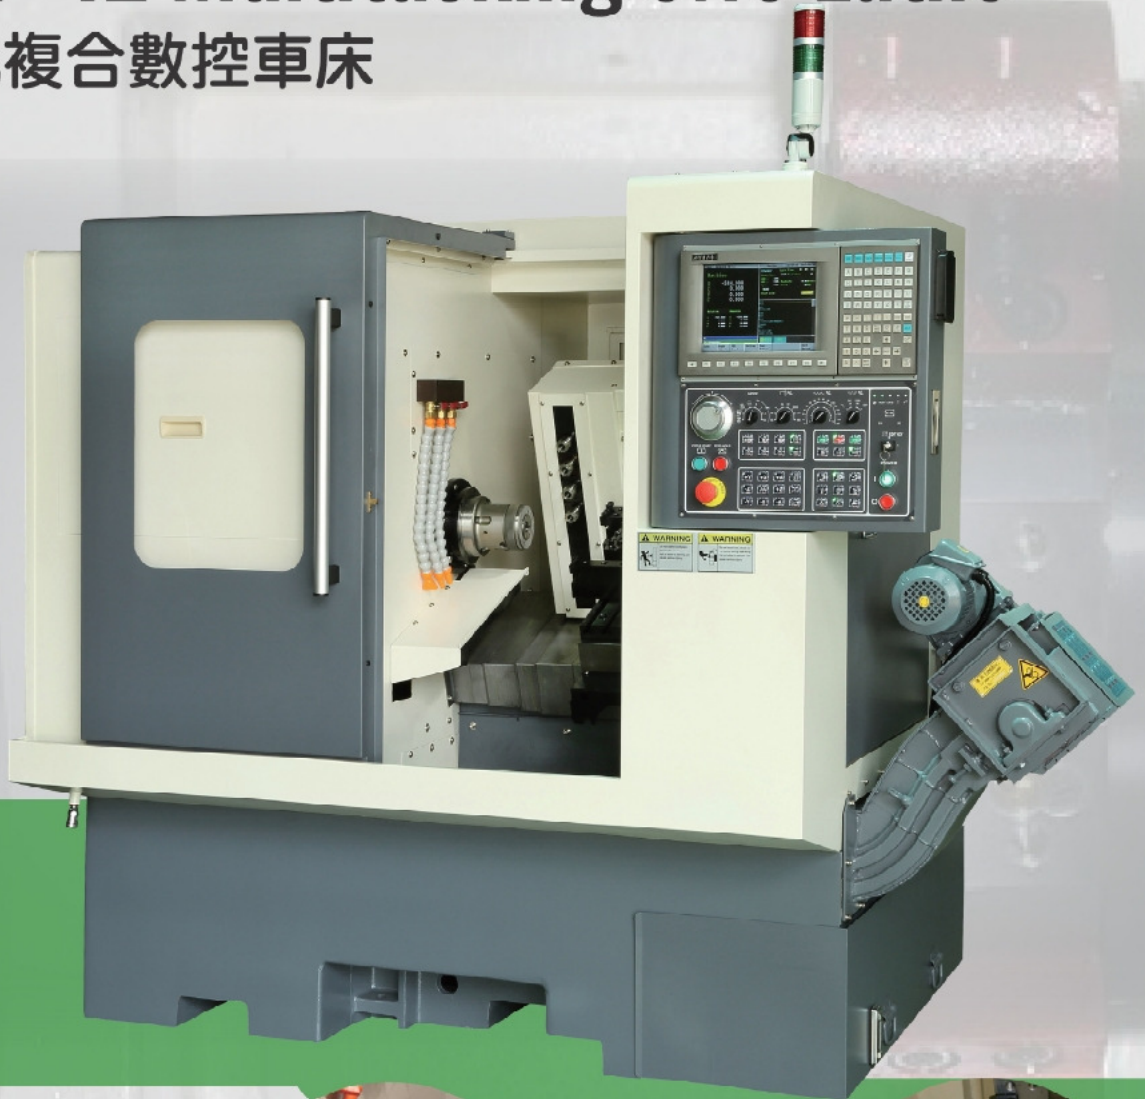

Y軸4軸 (ER-20) 側銑裝置: 軸與軸間距最大為55mm
Y-axis side milling (4-shsft, ER-20), and the distance between each shsft reaches 55mm.



(選配) 單件自動進/退料裝置
Automatic single workpiece loading & unloading device (Opt)



(選配) 三軸端面鑽孔及攻牙裝置
B-axis end side live tooling device (3-shaft) (Opt)

昌勇實業股份有限公司

JARNG YEONG ENTERPRISE CO., LTD

本公司之產品規格, 設計特性均不斷研究改進, 規格若有變更, 恕不另行通知。

All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

機械規格 MACHINE SPECIFICATION

機型 MODEL		HCP-25/HCP-30/HCP-42			
床面上旋徑 (mm) Swing over cross bed	300 ϕ	標準加工外徑 (mm) Standard turning dia.		110	140
最大加工外徑 (mm) Max. turning dia.	250	最大加工長度 (mm) Max. turning length		150	
X軸移動量 (mm) X-axis travel	350	Z軸移動量 (mm) Z-axis travel		250	
主軸迴轉速 (rpm) Spindle rotating speed	50-6000	筒夾 Collet	161E	163E	173E/C44
油壓夾頭 (inch) Hydraulic chuck	-	主軸鼻端 Spindle nose	直結式 Direct-connection		
主軸貫穿孔徑 (mm) Bore of spindle	28 ϕ 33 ϕ 45 ϕ	棒材容納直徑 (mm) Max. bar feeding dia	25 ϕ	30 ϕ	42 ϕ
最大內徑刀 Max. size of I.D. tool	20 ϕ	外徑刀尺寸 (mm) O.D. tool size	□20		
主軸馬達 (KW) Spindle motor	3.75 (opt 5.5)	X.Z軸快速移動 (m/min) Rapid travel speed (X-axis.Z-axis)	20		
八位置油壓刀塔 8-position hydraulic turret	8位 8 position	切削液容量 (L) Cutting coolant volume	110		
X.Z軸伺服馬達 (KW) Servo motor (X-axis.Z-axis)	1	機器尺寸 (長x寬x高) mm Machine size (LxWxH)	1780x1600x1800		
切削液馬達 (HP) Cutting coolant pump	1/4	機械淨重 (kgs) Machine net weight	2300		

刀塔標準附件 STANDARD ACCESSORIES FOR TURRET TYPE

項目 ITEM					
三爪油壓夾頭或筒夾套 3-jaw hydraulic chuck or collet chuck, choose one	任選1個 1 set / 1 pcs	主軸鎖定 Spindle lock	-	-	1組 1set
軟爪或筒夾 Standard soft jaw or collet	1組或筒夾1個 1 set / 1 pcs	工作燈 Lighting device		1個 1 pcs	
工具及工具箱 Tools & tool box	1組 1 set	切削水設備含集屑箱1/4HP Coolant device and chip bucket with 1/4HP pump		1組 1 set	
機械墊塊 Base leveling block	4個 4 pcs	自動潤滑系統 Automatic lubrication system		1組 1 set	
八位置油壓刀塔 8-position hydraulic turret	1組 1 set	刀具板 Tooling plate		1組 1 set	
內孔刀架I.D ϕ 20內徑 Tool holder for inner hole (I.D ϕ 20)	2個 2 pcs	內孔刀座I.D ϕ 20內徑 Tool base for inner hole (ID ϕ 20)		4個 4 pcs	
內孔套筒 (ϕ 6,8,10,12,16 - O.D.20) Tool holder bush for inner hole	各1個 1 pcs / each	車刀墊片(上、下) \square 20 Tool spacer (up . down)		4個 4 pcs	

櫥式標準附件 STANDARD ACCESSORIES FOR GANG TYPE

項目 ITEM					
三爪油壓夾頭或筒夾套 3-jaw hydraulic chuck or collet chuck, choose one	任選1個 1 set / 1 pcs	主軸鎖定 Spindle lock	-	-	1組 1set
軟爪或筒夾 Soft jaw or collet	1組或筒夾1個 1 set / 1 pcs	切削水設備含集屑箱1/4HP Coolant device and chip bucket with 1/4HP pump		1組 1 set	
工具及工具箱 Tools & tool box	1組 1 set	自動潤滑系統 Automatic lubrication system		1組 1 set	
機械墊塊 Base leveling block	4個 4 pcs	內孔刀架I.D ϕ 20內徑 Tool holder for inner hole (I.D ϕ 20)		3個 3 pcs	
櫥式刀具板 Gang type tool plate	1組 1 set	上刀架 \square 20 Upper tool holder		1組 1 set	
內孔套筒 (ϕ 6,8,10,12,16 - O.D.20) Tool holder bush for inner hole	各1個 1 pcs / each	下刀架 \square 20 Lower tool holder		1組 1 set	
工作燈 Lighting device	1個 1 pcs	雙刀架 \square 20 Twin tool holder		1組 1 set	

選購附件 OPTIONAL ACCESSORIES

1. C軸功能 C-axis function	7. 棒材自動送料機 Automatic bar feeder	13. Y軸側銑(四軸) ER-16/ER-20 Y-axis side live tooling device (4-shaft)	19. 成品取料裝置 Parts catcher
2. 拉料器 Auto link (bar puller)	8. 油霧回收機 Oil mist collector	14. 簡易式單支送料架 Simple type single bar feeding device	20. 三軸端面鑽孔,攻牙裝置 B-axis end side live tooling device (3-shaft)
3. 變壓器 Transformer	9. 密閉式空調冷卻機 Air cooler for electric box	15. 電動鏈板式鐵屑排出機 Electrical steel belt type chip conveyor	21. 多邊銑削裝置 Polygon Milling Cutter device
4. 穩壓器 Voltage stabilizer	10. CE規格 CE specification	16. 上方單軸側銑 Single shaft side live tooling device-Top	22. 主軸A2-4 Spindle nose A2-4
5. 主軸馬達7.5 HP Spindle motor 7.5 HP	11. 油水分離機 Oil skimmer device	17. 下方單軸側銑 Single shaft side live tooling device-Below	23. 八位置油壓刀塔 8-position hydraulic turret
6. 主軸馬達10 HP Spindle motor 10 HP	12. 強力冷卻幫浦1HP 1HP powerful coolant pump	18. 立式銑刀裝置 Single shaft vertical type live tooling device	24. 角度型端銑裝置(ER-16) Angle-adjustable end milling device



昌勇實業股份有限公司
JARNG YEONG ENTERPRISE CO., LTD.

台中市沙鹿區清泉路1-9號
No.1-9, Ching Chiuan Rd., Ching Chiuan Village,
Shalu Dist., Taichung 43346, Taiwan.
TEL : 886-4-2615-2157 FAX : 886-4-2615-2161
greenway@cnc-lathe.com http://www.cnc-lathe.com

代理商/AGENT